



INFICON EDC Inc. *Quality Quartz Crystals and Oscillators*


EC 47
Series
HCMOS
SMD Clock Oscillators

Features: 5.0 x 7.0 mm, 3.3 & 5.0 V, CMOS Compatible, Glass Seal Ceramic Lid

PARAMETERS	EC471	EC472
Package Part#	S292	
Frequency Range (MHz)	1.5 ~ 125	
Frequency Stability (\pm ppm)	50	
Temperature Range ($^{\circ}$ C)	Operating - 0 ~ +70 / Storage - -55 ~ +125	
Supply Voltage (V)	5.0 \pm 10%	3.3 \pm 10%
Supply Current (mA)	10 ~ 60 (Frequency Dependent)	8 ~ 35 (Frequency Dependent)
Rise & Fall Time (nS)	10 Max, <6 Typical	
Startup Time (mS)	10 Max, <5 Typical	
Output "0" / "1" Level (V)	10% of Vcc Max / 90% of Vcc Min	
Symmetry (Duty Cycle) (%)	40 / 60 STD (45 / 55 Available)	
Outputs (pF)	15 ~ 50	15 ~ 30
Tristate Function	With	

STANDARD AVAILABLE OPTIONS

Frequency Stability (\pm ppm): 10, 25, 100
 Operating Temp. Range ($^{\circ}$ C): -20 ~ +70, -30 ~ +75, -40 ~ +85

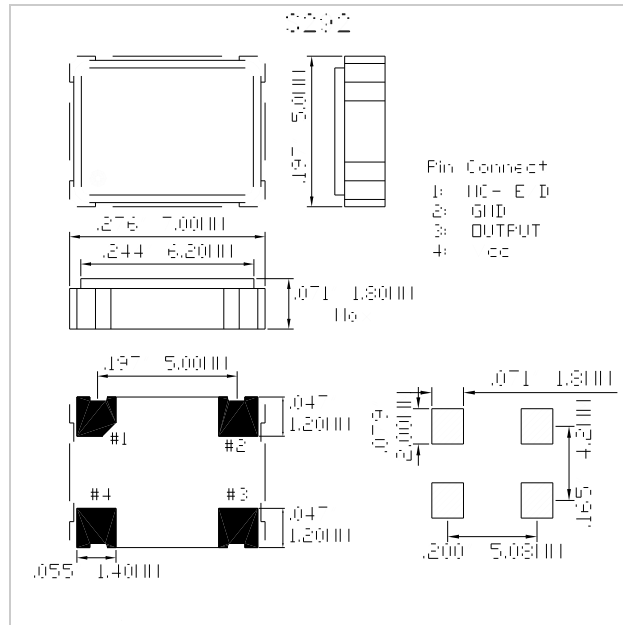

INFICON EDC Inc. • (800) EDC-XTAL • www.inficonedc.com

This drawing & information are the property of INFICON EDC Inc. and shall not be reproduced, copied or used in any manner without the sole permission of INFICON EDC Inc. All specification subject to change. Please contact factory for current specifications (Rev. 05/08)