



INFICON EDC Inc. *Quality Quartz Crystals and Oscillators*


**EC 48**  
Series  
**HCMOS**  
SMD Clock Oscillators

Features: 3.2 x 5.0 mm, 3.3 & 5.0 V, CMOS & TTL Compatible, Seam Seal Metal Lid

PARAMETERS	EC481	EC482
Package Part#	S610	
Frequency Range (MHz)	0.5 ~ 70	0.5 ~ 125
Frequency Stability (±ppm)	50	
Temperature Range (°C)	Operating - 0 ~ +70 / Storage - -55 ~ +125	
Supply Voltage (V)	5.0 ± 10%	3.3 ± 10%
Supply Current (mA)	10 ~ 40 (Frequency Dependent)	10 ~ 60 (Frequency Dependent)
Rise & Fall Time (nS)	10 Max	
Startup Time (mS)	10 Max	
Output "0" / "1" Level (V)	10% of Vcc Max / 90% of Vcc Min	
Symmetry (Duty Cycle) (%)	40 / 60 STD (45 / 55 Available)	
Outputs	CMOS - 15 ~ 30 pF / TTL - 2, 5 or 10	
Tristate Function	With	

**STANDARD AVAILABLE OPTIONS**

Frequency Stability (±ppm): 20, 25, 100  
 Operating Temp. Range (°C): -20 ~ +70, -30 ~ +75, -40 ~ +85

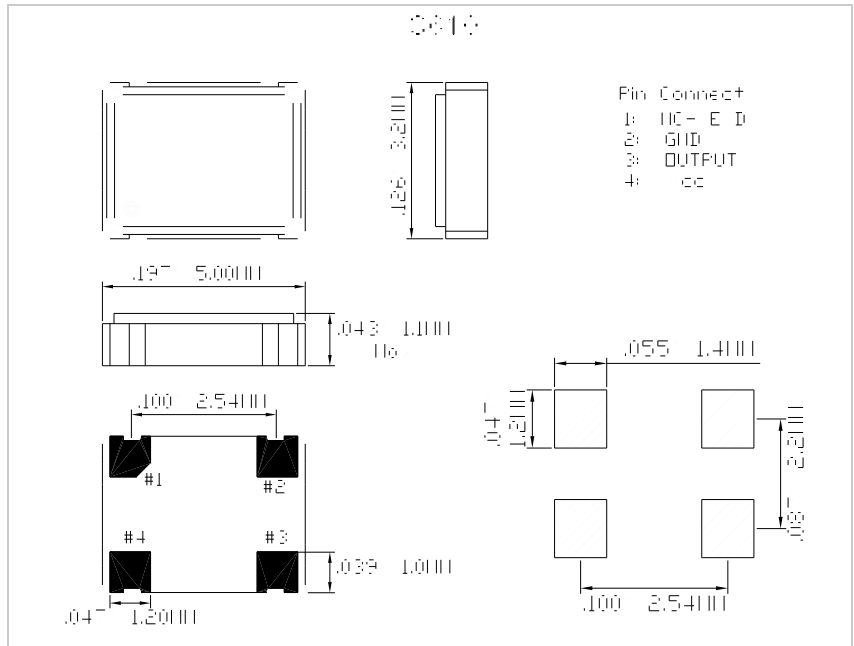

INFICON EDC Inc. • (800) EDC-XTAL • www.inficonedc.com

This drawing & information are the property of INFICON EDC Inc. and shall not be reproduced, copied or used in any manner without the sole permission of INFICON EDC Inc. All specification subject to change. Please contact factory for current specifications (Rev. 05/08)