




INFICON EDC Inc. *Quality Quartz Crystals and Oscillators*

EX 17
Series
COMMERCIAL
Thru-Hole Crystal

Features: Watch Crystal Series

PARAMETERS	EX171
Package Part#	T110
Frequency Range (KHz)	32.768
Frequency Calibration (\pm ppm)	20
Frequency Stability	-0.034 ± 0.006 ppm/ $^{\circ}$ C
Turnover Temperature ($^{\circ}$ C)	25 ± 5
Operating Temp. Range ($^{\circ}$ C)	$-10 \sim +60$
Max. Resistance Level (Ω)	35,000
Shunt Capacitance (pF)	1.6 Typical
Motional Capacitance (fF)	3.5 Typical
Load Capacitance (pF)	12.5
Max. Drive Level (μ W)	1
Aging (\pm ppm)	3.0 Maximum First Year

STANDARD AVAILABLE OPTIONS

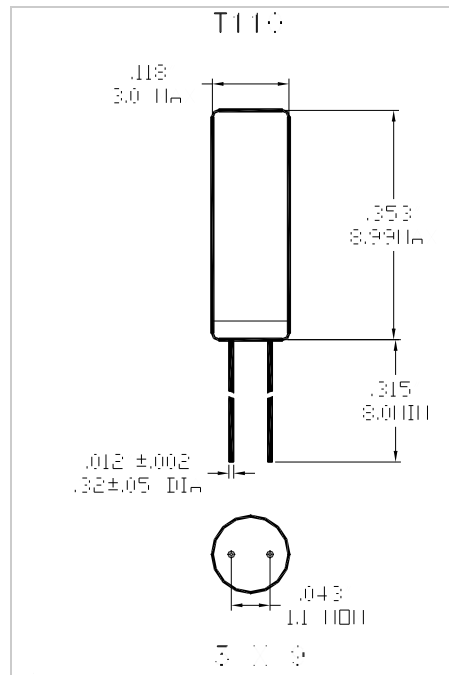

INFICON EDC Inc. • (800) EDC-XTAL • www.inficonedc.com

This drawing & information are the property of INFICON EDC Inc. and shall not be reproduced, copied or used in any manner without the sole permission of INFICON EDC Inc. All specification subject to change. Please contact factory for current specifications (Rev. 05/08)