



INFICON EDC Inc. *Quality Quartz Crystals and Oscillators*


EC 53
Series
HCMOS
Thru-Hole Oscillators

Features: 14 Pin DIP, 3.3 & 5.0 V, CMOS & TTL Compatible

PARAMETERS	EC531	EC532
Package Part#	T277	
Frequency Range (MHz)	1.0 ~ 100	
Frequency Stability (\pm ppm)	50	
Temperature Range ($^{\circ}$ C)	Operating - 0 ~ +70 / Storage - -55 ~ +125	
Supply Voltage (V)	5.0 \pm 10%	3.3 \pm 10%
Supply Current (mA)	40 Max	
Rise & Fall Time (nS)	10 Max, <6 Typical	
Startup Time (mS)	10 Max, <5 Typical	
Output "0" / "1" Level (V)	10% of Vcc Max / 90% of Vcc Min	
Symmetry (Duty Cycle) (%)	40 / 60 STD (45 / 55 Available)	
Outputs	CMOS - 15 ~ 50 pF / TTL - 2, 5 or 10	
Tristate Function	With	

STANDARD AVAILABLE OPTIONS

- Frequency Stability (\pm ppm): 10, 25, 100
- Operating Temp. Range ($^{\circ}$ C): -20 ~ +70, -30 ~ +75, -40 ~ +85
- True TTL available
- Without Tristate available

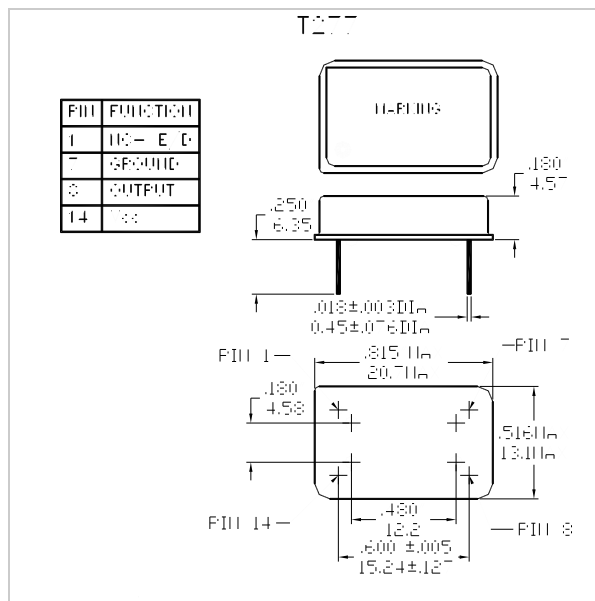

INFICON EDC Inc. • (800) EDC-XTAL • www.inficonedc.com

This drawing & information are the property of INFICON EDC Inc. and shall not be reproduced, copied or used in any manner without the sole permission of INFICON EDC Inc. All specification subject to change. Please contact factory for current specifications (Rev. 05/08)